



DISTRICT BOARD

Megan Clark
Rabi Elias
Russ Greenfield
Craig K. Murray
Judy Schriebman

DISTRICT ADMINISTRATION

Chris DeGabriele,
Interim General Manager
Michael Cortez,
District Engineer
Mel Liebmann,
Plant Manager
Susan McGuire,
Administrative Services Manager
Greg Pease,
Collection System/Safety Manager

ADDENDUM NO. 2

Date: October 3, 2018
Project: **MARINWOOD-HWY 101 TRUNK SEWER UNDERCROSSING
EMERGENCY REPAIR**
Job No.: **11200-03**
To: All Planholders and Prospective Bidders

This addendum consists of two (2) page(s) including this page. Acknowledge receipt of this addendum in the space provided on page 11, Proposal and Bid Schedule, of the Contract Documents, and by signing in the space provided below. Submit original copy of this addendum cover page along with the bid. Failure to do so may disqualify the bidder.

Las Gallinas Valley Sanitary District: Bidder: _____

Michael P. Cortez, PE, District Engineer (Authorized Signature) _____ (Date)
Tel. No. (415) 472-1033, ext. 18

The following changes and/or clarifications are hereby made to the Contract Documents, and shall become a part of the Contract Documents dated September 2018.

General Information:

- 1) Regarding point repair required in Technical Specifications Section 02650-9, page 172, paragraphs 3.01.E and F, Contractor shall be responsible in correcting deficiencies in the existing sewer as shown in the attached CCTV inspection log prepared by MSI dated 3/16/2018. Contractor shall include in its bid an allowance for correcting the deficiencies that may prevent proper installation of the CIPP.
- 2) Interested parties may obtain a copy of the full CCTV inspection DVD at the District office by contacting Irene Huang at ihuang@lgvsd.org, or by downloading from the Dropbox link below. Note that the CCTV video being provided is for informational purposes only. Contractor is still required to televise the line as part of the project.


Link: <https://www.dropbox.com/sh/j1n83rntsrduhk/AAAKAGRkX7-NmiV60vZwXGpHa?dl=0>



Las Gallinas Valley Sanitary District
 Sewer Trunk Video Inspection
 Various Locations

Date 3/16/2018

1.2	Location	Marinwood-Lucas Valley Trunk	Diameter	18"	TV'd Ftg	417'
	Upstream MH	M000.51	Material	CMP	Total Ftg	417'
	Downstream MH	M000.49	Direction	DS		

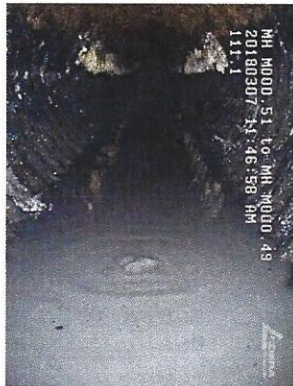


111' I/I under flow




119' Grease



153' Faulty joint seal

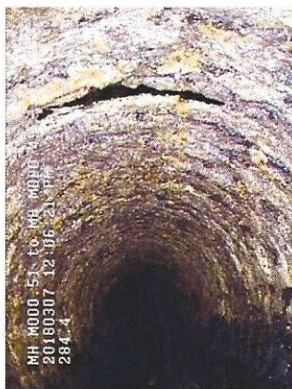

Holes in pipe wall at 246' & 284'

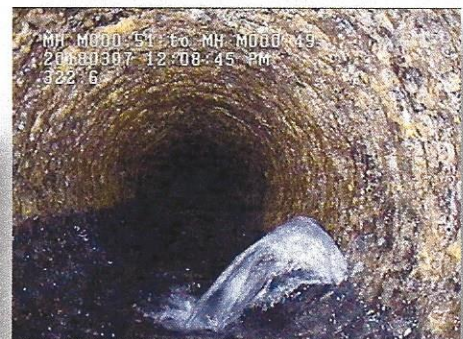

~~322~~ I/I gusher

Summary:	Corrugated pipe severely corroded however no deformations noted.
Recommendation:	Remove grease, seal active infiltration. Install Dynaliner PVC Thermoformed SDR35 Liner.